VFTM

VERTICAL FORAGE WAGON

2.5



Mix with quality!

- *Loading box and housing of the loader cutter built from stainless steel;*
- *The VFTM 2.5 with loader, features fully hydraulic drive, with pump coupled directly to the tractor PTO, powering: Internal vertical auger, loading cutter, dosing gate and conveyor;*
- *Internal vertical auger driven by a hydraulic motor coupled to a reduction gearbox;*
- *The VFTM 2.5 without loader, uses the tractor's hydraulic controls to drive the internal vertical auger, dosing gate and conveyor.*

Ideal for silage removal, mixing and cutting of varied fibers and dry matter, as well as allowing uniform discharge of the mixture.



Optional

- *Double discharge.*
- *Discharge conveyor.*
- *Hydraulic lift system.*
- *Electronic scales with or without diet formulas.*
- *Stainless-steel-lined bottom.*
- *Hydraulic counterknife drive.*

WITH LOADER

A key advantage of this equipment is the fully closed circuit hydraulic drive system (there is no mixing of tractor/ machine oil), without the use of the conventional PTO driveshaft.









WITHOUT LOADER

Equipment actuation occurs via the tractor's hydraulic control, without the usage of the PTO driveshaft drive.





Technical Specifications

Model	Capacity (t)	Capacity (m^3)	Loader	Running gear	Power	Weight (Kg)	Length (mm)	Width (mm)	Height (mm)
VFTM 2.5	1.2	2	YES	RS 14	30 - 40 (CV)	1,190	3,690	1,675	2,025
VFTM 2.5	1.2	2	NO	RS 14	40 (L/min)	740	2,820	1,700	1,850

- *Note: The maximum capacity in tons described above may vary according to the density and type of product used.*

VFTM

VERTICAL FORAGE WAGON


3.5 / 6.0 / 9.0

WITH LOADER





Ideal for desilage, mixing and cutting varied fibers and dry matter, as well as allowing a uniform discharge of the mixture

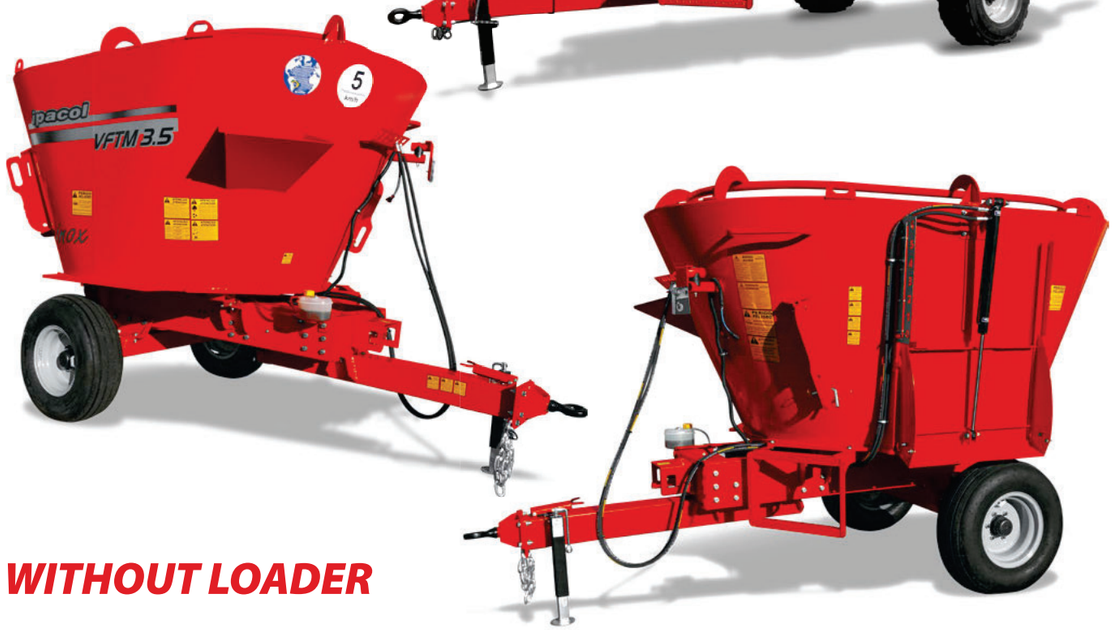


WITHOUT LOADER

LOADING SYSTEM


Operates across the full width of the wagon and is equipped with a silage-removal milling roller and a throwing roller, which assists in loading all milled material, preventing re-cutting and preserving the original fiber length.

PATENTE REQUERIDA
INPI INSTITUTO NACIONAL DA PROPRIEDADE INDUSTRIAL

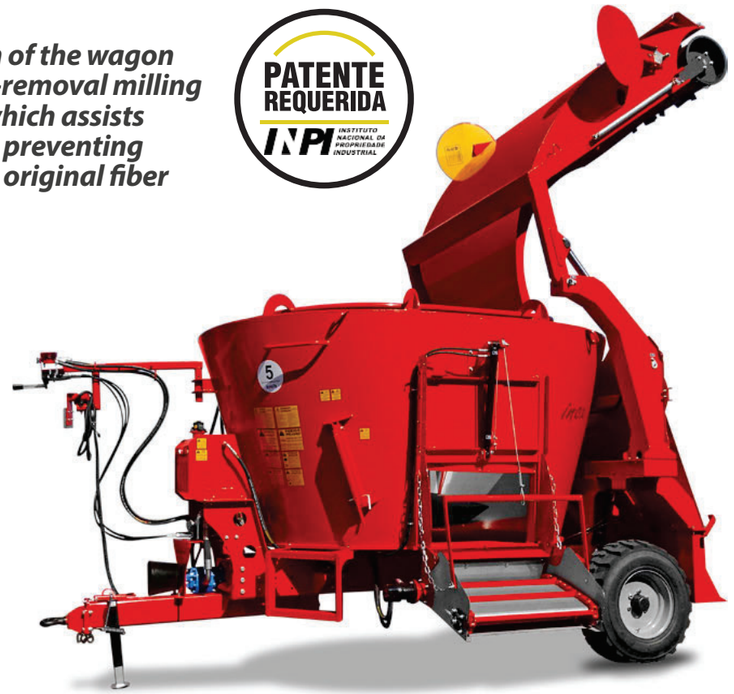

Mix with Quality!

- *Auger cutting knives developed to ensure a long service life;*
- *Loading box and loading cutter housing built from stainless steel;*
- *Independent weighing system, fixed only in the load box, isolating other variables that may interfere with the weighing of the formulated diet;*
- *Independent hydraulic controls, driven by PTO driveshaft.*

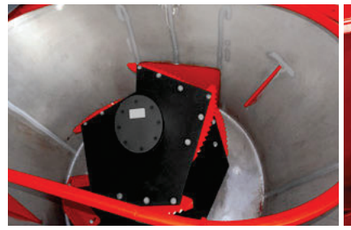







Optional

- *Double discharge.*
- *Discharge conveyor.*
- *Hydraulic lifting system.*
- *Stainless-steel-lined bottom.*
- *Electronic scale.*
- *Hydraulic actuation of the counter knives.*
- *Stainless steel auger.*
- *Magnet on the mixing auger.*

Technical Specifications

Model	Capacity (t)	Capacity (m^3)	Loader	Running gear	Power (CV)	Weight (Kg)	Length (mm)	Width (mm)	Height (mm)
VFTM 3.5	2	3.5	YES	RS 15	50 - 60	2,870	4,740	2,050	2,400
VFTM 3.5	2	3.5	NO	RS 15	50 - 60	1,660	3,700	1,950	2,260
VFTM 3.5	2	3.5	YES	RS 16.5	50 - 60	3,500	4,780	2,440	2,500
VFTM 3.5	2	3.5	NO	RS 16.5	50 - 60	1,500	3,770	2,800	2,800
VFTM 6.0	3.5	6	YES	RS 16.5	70	3,500	4,995	2,450	2,650
VFTM 6.0	3.5	6	NO	RS 16.5	70	2,360	3,985	2,450	2,400
VFTM 6.0	3.5	6	YES	RS 15.5	70	3,465	5,100	2,700	2,600
VFTM 6.0	3.5	6	NO	RS 15.5	70	2,300	4,050	2,700	2,500
VFTM 9.0	4.5	8.5	YES	RS 15.5	90	4,000	5,350	2,600	2,950
VFTM 9.0	4.5	8.5	NO	RS 15.5	90	2,450	4,200	2,600	2,800

- *Note: The maximum capacity in tons described above may vary according to the density and type of material used.*