ipacol
parceria de sol a sol

VFTM

TRATOMIX FORAGE WAGON

2.5 / 4.0 / 6.0 / 8.0 / 10.0

Ideal for desilage and mixing concentrates, as well as allowing uniform discharge.







WITH OR WITHOUT LOADER




PREMIADO
DESTAQUE
PRÊMIO 2009
GERDAU
MELHORES
DA TERRA
APROVADO PELO USUÁRIO
Tratomix 4.0

Mix with Quality!

- *The Tratomix has a mixing system with a horizontal auger with discontinuous, offset flights and beaters that chop, move and discharge products;*
- *Cargo box and housing of the loader cutter made of stainless steel;*
- *It has all independent hydraulic controls, driven by PTO driveshaft.*

Optional

- *Carbon steel cargo box with a partially stainless steel-lined bottom.*
- *Conveyor lifting system.*
- *Electronic scale.*

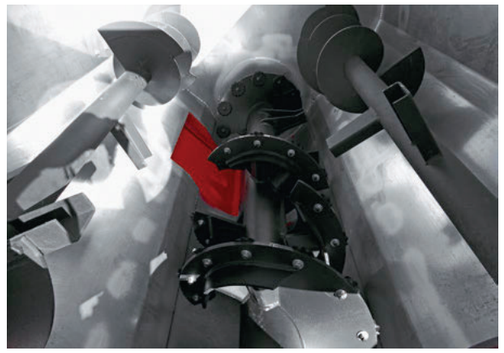

Technical Specifications

Model	Capacity (t)	Capacity (m^3)	Loader	Running gear	Power (CV)	Weight (Kg)	Length (mm)	Width (mm)	Height (mm)
VFTM 2.5	1.1	2.5	YES	RS 16	50	1,650	4,750	2,350	1,885
VFTM 2.5	1.1	2.5	NO	RS 16	50	1,320	3,850	2,350	1,750
VFTM 4.0	1.8	4	YES	RS 15	70	2,500	5,150	2,350	2,200
VFTM 4.0	1.8	4	NO	RS 15	70	2,000	4,600	2,350	2,050
VFTM 6.0	2.7	6	YES	RS 16.5	70	2,800	5,350	2,500	2,350
VFTM 6.0	2.7	6	NO	RS 16.5	70	2,300	5,000	2,500	2,300
VFTM 8.0	3.6	8	YES	RS 15.5	80	3,600	6,100	2,600	2,600
VFTM 8.0	3.6	8	NO	RS 15.5	80	2,920	5,100	2,600	2,400
VFTM 10.0	4.5	10	YES	RS 22.5	90	4,870	6,400	2,850	2,900
VFTM 10.0	4.5	10	NO	RS 22.5	90	3,970	6,050	2,850	2,800

- *Note: The maximum capacity in tons described above may vary according to the density and type of product used.*