VFMT

TUMBLING FORAGE MIXER WAGON

4.5 / 6.0 / 9.0 / 12.0 / 14.0 / 18.0 / 24.0

Mixer for rations, hay, and short- or medium-fiber forage in the form of silage.



Mix with quality!


- *Provides a homogeneous mixture of the ingredients used in the animal diet;*
- *Dual rotor mixing system, arranged in staggered sections that gently tumble the ingredients, synchronized with alternating movement of two horizontal helical augers arranged parallel to the mixing rotor;*
- *Stainless steel cargo box;*
- *Complies with NR-12 requirements.*









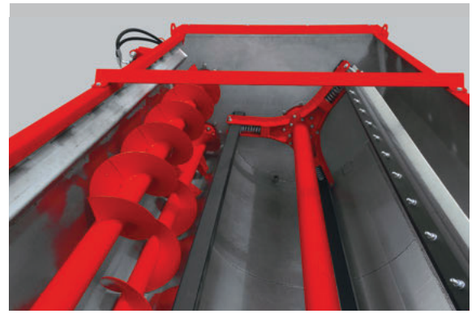



Options

- *Carbon steel cargo box and stainless steel bottom.*
- *Electronic scale.*
- *Magnetic plate on the discharge chute.*
- *Suspension kit VFMT 9.0 to 24.0.*
- *Polypropylene scraper.*

Technical Specifications

Model	Capacity (t)	Capacity (m^3)	Running gear	Power (CV)	Weight (Kg)	Length (mm)	Width (mm)	Height (mm)
VFMT 4.5	2.1	4	RS 15	55	1,750	4,100	2,250	2,150
VFMT 4.5	2.1	4	RS 15.5	55	1,800	4,100	2,250	2,200
VFMT 6.0	2.8	6	RS 15.5	60	3,165	4,900	2,700	2,450
VFMT 6.0	2.8	6	RT 15.5	60	3,400	4,900	2,750	2,550
VFMT 9.0	4	9	RS 22.5	70	4,300	5,900	2,750	2,550
VFMT 9.0	4	9	RT 15.5	70	4,125	5,900	2,750	2,550
VFMT 9.0	4	9	RT 15.5*	70	4,400	5,900	2,750	2,750
VFMT 12.0	5.7	12	RS 22.5	85	5,950	6,050	3,050	2,850
VFMT 12.0	5.7	12	RT 15.5	85	5,900	6,050	3,250	3,000
VFMT 12.0	5.7	12	RT 15.5*	85	6,400	6,050	3,200	3,000
VFMT 14.0	6.6	14	RT 22.5	100	7,000	6,850	3,050	3,000
VFMT 14.0	6.6	14	RT 22.5*	100	8,200	6,850	3,250	3,050
VFMT 18.0	8.5	18	RD 22.5	110	8,000	6,850	3,450	3,150
VFMT 18.0	8.5	18	RT 22.5	110	9,100	6,850	3,400	3,300
VFMT 18.0	8.5	18	RT 22.5*	110	9,550	6,850	3,400	3,200
VFMT 24.0	11.4	24	RT 22.5*	180	11,300	7,000	3,600	3,500

*Equipped with suspension kit

Note: The maximum load capacity (t) shown above may vary depending on the density and type of product used.